


## 22702 TOMI LED3W GU10-WW

LED light source

5905339227027



Kanlux TOMI LED sources use hybrid heat sink construction thanks to which heat exchange with the environment is much more effective. Moreover, white colour of Kanlux TOMI LED housing makes the source's design interesting. The light in these sources is evenly distributed by the use of matt shade.

### GENERAL DATA:


**Colour:** white  
**Lamp designed for decorative lighting:** no  
**Compatible with a dimmer:** no  
**Height [mm]:** 55  
**Diameter [mm]:** 50  
**Mercury content:** no

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50/60  
**Lamp-power factor:** 0.5  
**Rated power [W]:** 3  
**Lampshade material:** plastic  
**Light source:** PAR16  
**Diode type:** LED SMD  
**Total rated luminous flux [lm]:** 250  
**Colour temperature:** Warm white  
**Colour temperature [K]:** 3000  
**Colour uniformity [SDCM]:** ≤6  
**Colour-rendering index Ra:** ≥80  
**Cap:** GU10  
**Rated lamp-service life [h]:** 20000  
**Number of on/off cycles:** ≥15000  
**Rated beam angle [°]:** 120  
**Rated light level [°]:** 120  
**Light source EEL:** A++  
**Lamp rated current [mA]:** 30  
**Annual power consumption [kWh/1000h]:** 3  
**Luminous efficiency of the lamp [lm/W]:** 83  
**Ignition time [s]:** ≤0,5  
**Lamp-heating time to 60% of the full luminous flux [s]:**  
Negligible  
**Lamp-heating time to 95% [s]:** <2  
**Lamp premature-failure indicator:** <5% po 1000h  
**Lamp service life factor after the period of 6000h [%]:**  
≥90  
**Luminous flux retention factor at the end of rated service life [%]:** ≥70

## 22702 TOMI LED3W GU10-WW

LED light source

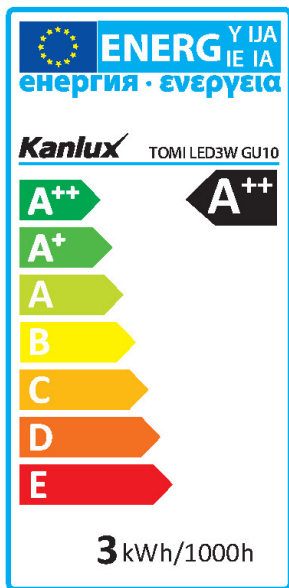

**Luminous flux retention factor after the period of 6000h [%]:**  $\geq 80$

**Declaration of equality in power rating [W]:** 25

**Rated useful luminous flux [lm]:** 200

**Rated peak light intensity [cd]:** 100

**Light source shape:** spot

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 10

**Number of units in the secondary packaging:** 10

**Number of units in the packaging:** 100

**Net unit weight [g]:** 28

**Grammage [g]:** 42

**Length of a unit pack [cm]:** 5

**Width of a unit pack [cm]:** 5

**Height of a unit pack [cm]:** 6.5


**Weight of a cardboard box [kg]:** 4.2

**Width of a cardboard box [cm]:** 28

**Height of a cardboard box [cm]:** 15

**Length of a cardboard box [cm]:** 54

**Volume of a cardboard box [m<sup>3</sup>]:** 0.02268

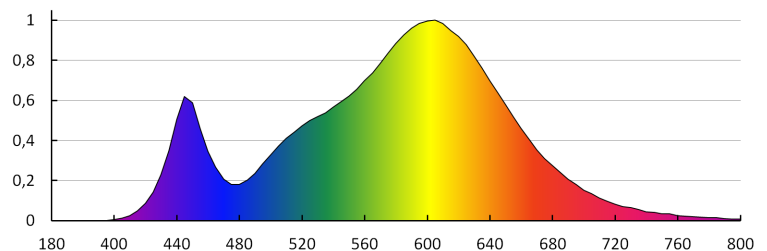

KANLUX S.A. (kat 22702) TOMI LED3W GU10-WW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 22702) TOMI LED3W GU10-WW  
Lampy: 1 x TOMI LED3W GU10-WW

