
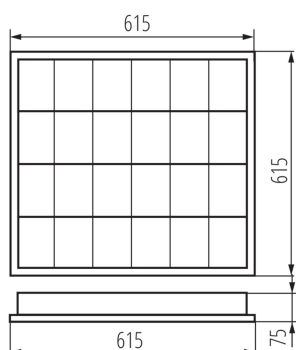


25711 NOTUS 3WS EVG 418 NT

Ceiling louver fitting

5905339257116



Kanlux NOTUS are raster facade luminaires that can be mounted quickly and easily. Raster lighting is still a very popular solution for office and industrial spaces. It is all due to good lighting parameters at a good price, simple construction and durability of the materials of which they are made.

GENERAL DATA:

Colour: white
Place of assembly: ceiling mounted
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Stabiliser/lamp start: warm
Replaceable light source: yes
Light source included: no
Length [mm]: 615
Width [mm]: 615
Height [mm]: 75

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50/60
Maximum power [W]: 4 x 18
Class of protection against electric shock: I
Light source: T8
Cap: G13
Ambient temperature range to which the product can be exposed: 5÷25
The fixture is adapted to the light sources of the following energy classes: A++,A+,A,B
Enclosure material: steel
Reflector material: aluminum alloy
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 1÷2,5
Stabiliser type: EVG
Stabiliser energy class: A2
IP class: 20

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 1
Number of units in the secondary packaging: 1
Number of units in the packaging: 1
Net unit weight [g]: 2420
Grammage [g]: 3030
Length of a unit pack [cm]: 65

25711 NOTUS 3WS EVG 418 NT

Ceiling louver fitting




Width of a unit pack [cm]: 62.5
Height of a unit pack [cm]: 8.5
Weight of a cardboard box [kg]: 3.03
Width of a cardboard box [cm]: 63
Height of a cardboard box [cm]: 8.8
Length of a cardboard box [cm] : 65.5
Volume of a cardboard box [m³]: 0.036313

ADDITIONAL INFORMATION:

- half-parabolic reflector / V-shaped grille cross-bars
- fluorescent lamp sockets concealed with a reflector
- light fixtures designed for hanging on slings
- Class A2 OSRAM ballast
- easy installation of the grille on spring hooks
- quick coupling for connecting the power supply, easier and quicker installation, powder coating
- NOTUS 3WS equipped with a "warm start" ballast

KANLUX S.A. (kat 25711) NOTUS 3WS EVG 418 NT / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 25711) NOTUS 3WS EVG 418 NT
Lampy: 4 x T26 19W/827

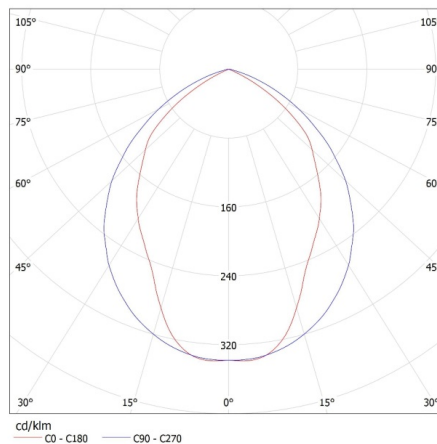

25711 NOTUS 3WS EVG 418 NT

Ceiling louver fitting

ACCESSORIES:

07870 ROPE-NT 150

ROPE-NT 150 steel rope (double) for suspending fittings, 2 pcs. in a set



07871 ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

