


Embedded louver fitting

5905339197344

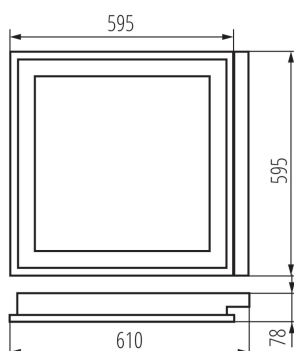

Kanlux REGIS are raster recessed luminaires that can be mounted quickly and easily with spring clips and quick couplings. Raster lighting is still a very popular solution for office and industrial spaces.

GENERAL DATA:

Colour: white
Place of assembly: Recessed mount in the ceiling
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Stabiliser/lamp start: cold
Replaceable light source: yes
The product is not suitable to be covered with a heat-insulating material: yes
Light source included: no
Length [mm]: 610
Width [mm]: 595
Height [mm]: 78


TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50/60
Maximum power [W]: 4 x 18
Class of protection against electric shock: I
Lampshade material: PMMA
Light source: T8
Cap: G13
Ambient temperature range to which the product can be exposed: 5÷25
The fixture is adapted to the light sources of the following energy classes: A++,A+,A,B
Enclosure material: steel
Reflector material: aluminum alloy
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 1÷2,5
Stabiliser type: EVG
Stabiliser energy class: A2
IP class: 40

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 1
Number of units in the secondary packaging: 1
Number of units in the packaging: 1
Net unit weight [g]: 2910

Embedded louver fitting

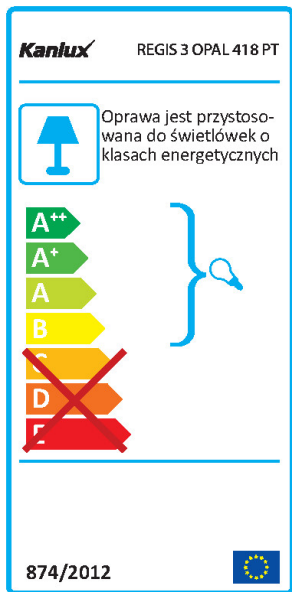

Grammage [g]: 3500

Length of a unit pack [cm]: 65

Width of a unit pack [cm]: 62.5

Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 3.5

Width of a cardboard box [cm]: 63

Height of a cardboard box [cm]: 8.8

Length of a cardboard box [cm]: 65.5


Volume of a cardboard box [m³]: 0.036313

ADDITIONAL INFORMATION:

- half-parabolic reflector / V-shaped grille cross-bars / fluorescent lamp sockets concealed with a reflector
- the casing is provided with openings for feed-through power supply
- protective conductor on the grille providing additional protection against electric shock
- easy installation of the grille on spring hooks
- quick coupling for connecting the power supply, easier and quicker installation, Class A2 TRIDONIC ballast
- powder coating

KANLUX S.A. (kat 19734) REGIS 3 OPAL 418 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 19734) REGIS 3 OPAL 418
Lampy: 4 x T36 18W/827

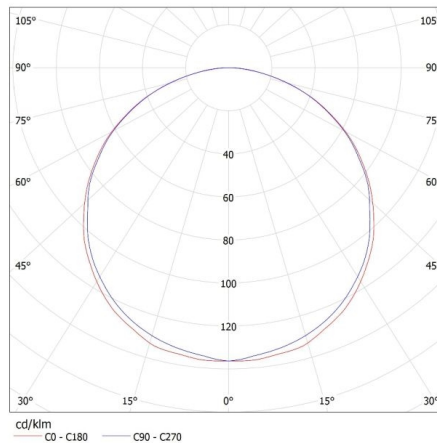

Embedded louver fitting

ACCESSORIES:

72333 CLP-REGIS/PT

CLP-REGIS/PT mounting support, used for building in fittings in a plasterboard suspended ceiling. 4 pcs. in a set.

