


04260 TUNA S1101-W

Ceiling-mounted light fitting with replaceable light source

5905339042606

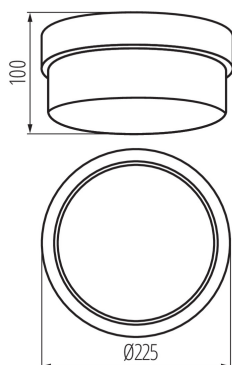

Kanlux TUNA ceiling light fixture is a good choice for staircases, basements, attics and other such rooms. Proper level of protection against dust and moisture allows for its use both indoors and outdoors.

GENERAL DATA:

Colour: white
Place of assembly: wall mounted, ceiling mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Replaceable light source: yes
Light source included: no
Height [mm]: 100
Diameter [mm]: 225

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50/60
Maximum power [W]: max 100
Class of protection against electric shock: II
Lampshade material: glass
Light source: GLS/CFL/LED
Cap: E27
The fixture is adapted to the light sources of the following energy classes: A++,A+,A,B,C,D,E
Enclosure material: plastic
Connection type: Terminal block
Range of sections of wires used [mm²]: 1-1,5
IP class: 44


LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 5
Number of units in the secondary packaging: 1
Number of units in the packaging: 5
Net unit weight [g]: 1150
Grammage [g]: 1375
Length of a unit pack [cm]: 22.5
Width of a unit pack [cm]: 11
Height of a unit pack [cm]: 23
Weight of a cardboard box [kg]: 6.875
Width of a cardboard box [cm]: 24
Height of a cardboard box [cm]: 47
Length of a cardboard box [cm]: 45
Volume of a cardboard box [m³]: 0.05076


Ceiling-mounted light fitting with replaceable light source

Kanlux TUNA S1101

Oprawa jest przystosowana do żarówek o klasach energetycznych



874/2012



KANLUX S.A. (kat 4260) TUNA S1101 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 4260) TUNA S1101
Lampy: 1 x A60 100W/c

