


28780 MINI GORD DLP-50-W

Ring for spotlight fittings

5905339287809

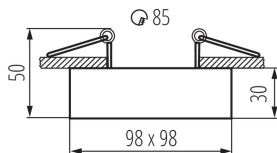

The Mini version of the Kanlux GORD fixtures. A perfect alternative for people who want to use surface-mounted fixtures in a suspended ceiling, because the manner of installation is the same as for recessed-eyelet fixtures. An additional advantage is the angular adjustment of the MINI BORD fixtures within the range of 30°.

GENERAL DATA:

Colour: white

Necessity of using self-shielding lamps: yes

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Decorative ring without a ceramic frame: yes

Replaceable light source: yes

The product is not suitable to be covered with a heat-insulating material: yes

Light source included: no

Length [mm]: 98

Width [mm]: 98

Height [mm]: 50

Assembly hole [mm]: Ø85

TECHNICAL DATA:

Rated voltage [V]: 12 AC; 12 DC; 220-240 AC

Maximum power [W]: max 35

Class of protection against electric shock: II/III

Light source: MR16/PAR16

Cap: Gx5,3/GU10

Ambient temperature range to which the product can be exposed: 5÷25

The fixture is adapted to the light sources of the following energy classes: A++,A+,A,B,C,D,E

Enclosure material: aluminum alloy, steel

Lighting-fixture angle regulation: in one axis

Lighting-fixture angle regulation [°]: 30

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 50

Number of units in the secondary packaging: 1


Number of units in the packaging: 50

Net unit weight [g]: 250

Grammage [g]: 302

28780 MINI GORD DLP-50-W

Ring for spotlight fittings

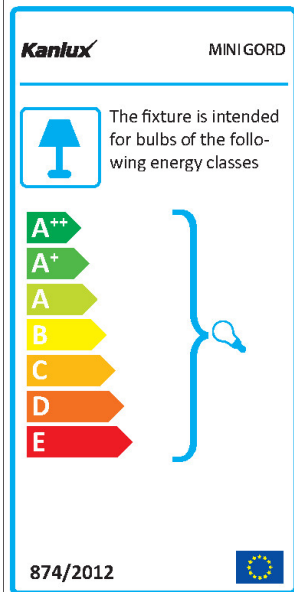

Length of a unit pack [cm]: 12.5

Width of a unit pack [cm]: 10.5

Height of a unit pack [cm]: 5.5

Weight of a cardboard box [kg]: 15.1

Width of a cardboard box [cm]: 22

Height of a cardboard box [cm]: 30

Length of a cardboard box [cm]: 64

Volume of a cardboard box [m³]: 0.04224

