

# **28993** REKA LED EL 7W-O-W

### Facade luminaire

5905339289933


















TThe main advantage of the Kanlux REKA LED is an interesting visual effect, which the lamp creates when switched on, as well as the free luminous flux adjustment by means of masking flaps. The Kanlux REKA LED can be used for building-facade lighting.

### GENERAL DATA:

Colour: white

Place of assembly: wall mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Wykrywanie ruchu: no Replaceable light source: no

Fixture lighting direction: up and down

Length [mm]: 135 Width [mm]: 115 Height [mm]: 100

Integrated LED light source: yes

#### TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50/60 Maximum power [W]: 7

Class of protection against electric shock: |

Diode type: LED COB

Luminous flux [lm]: max 510
Colour temperature: white
Colour temperature [K]: 4000
Colour uniformity [SDCM]: ≤6
Colour-rendering index Ra: ≥80

Service life [h]: 30000

Number of on/off cycles: ≥20000

Lighting angle [°]: max 90

Ambient temperature range to which the product can be

exposed: -15÷35

**Enclosure material**: aluminum alloy **Connection type**: Bolt terminal block

Range of sections of wires used [mm<sup>2</sup>]: 1

The fixture set includes built-in LED's with the following

energy classes: A++,A+,ALamp-heating time [s]:  $\leq 1$ Lamp-ignition time [s]:  $\leq 0.5$ 

IP class: 54

LOGISTIC DATA:





# 28993 REKA LED EL 7W-O-W

## Facade luminaire



**Unit of measurement**: unit **Packaging method**: 20

Number of units in the secondary packaging:  $\boldsymbol{1}$ 

Number of units in the packaging: 20


Net unit weight [g]: 570 Grammage [g]: 678

Length of a unit pack [cm]: 15 Width of a unit pack [cm]: 12 Height of a unit pack [cm]: 11

Weight of a cardboard box [kg]: 13.56
Width of a cardboard box [cm]: 31
Height of a cardboard box [cm]: 25
Length of a cardboard box [cm]: 62
Volume of a cardboard box [m³]: 0.04805

# **ADDITIONAL INFORMATION:**

• Beam-angle adjustment

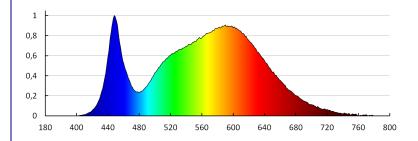

KANLUX S.A. (kat 28993) REKA LED EL 7W-O-W / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28993) REKA LED EL 7W-O-W Lamps: 1 x REKA LED EL 7W-O-W

