

## 33215 T8 LED GLASSv4 24W-CW


LED light source

5905339332158



up to

160  $\frac{\text{lm}}{\text{W}}$



Kanlux T8 LED GLASS is a well-known and proven line of fluorescent lamps based on high-performance LED diodes, which are placed in a milky, glass body, thanks to which they evenly emit light. High-quality workmanship and care for the best-class components are the most important features of Kanlux T8 LED GLASSv4. In addition, these unique LED lamps have a 3-year warranty and a luminous efficacy of up to 160 lumens from Watt.

### GENERAL DATA:

**Colour:** white

**Lamp designed for decorative lighting:** no

**Compatible with a dimmer:** no

**Power supply of T8 LED fluorescent lamps:** Unilateral

**Length [mm]:** 1512

**Diameter [mm]:** 28

**Mercury content:** no

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Lamp-power factor:** 0.9

**Rated power [W]:** 24

**Lampshade material:** glass

**Light source:** T8 LED

**Diode type:** LED SMD

**Total rated luminous flux [lm]:** 3840

**Colour temperature:** cold white

**Colour temperature [K]:** 6500

**Colour uniformity [SDCM]:**  $\leq 6$

**Colour-rendering index Ra:**  $\geq 80$

**Cap:** G13

**Rated lamp-service life [h]:** 30000

**Number of on/off cycles:**  $\geq 30000$

**Rated beam angle [°]:** 220

**Rated light level [°]:** 220

**Light source EEI:** A++

**Lamp rated current [mA]:** 110

**Luminous efficiency of the lamp [lm/W]:** 160

**Ignition time [s]:**  $\leq 0,5$

**Lamp-heating time to 60% of the full luminous flux [s]:**  
Negligible

**Lamp-heating time to 95% [s]:**  $< 2$


**Lamp premature-failure indicator:**  $< 5\%$  po 1000h

**Ambient temperature range to which the product can be exposed:**  $-10 \div 40$

**Lamp service life factor after the period of 6000h [%]:**  
 $\geq 90$

## 33215 T8 LED GLASSv4 24W-CW

LED light source

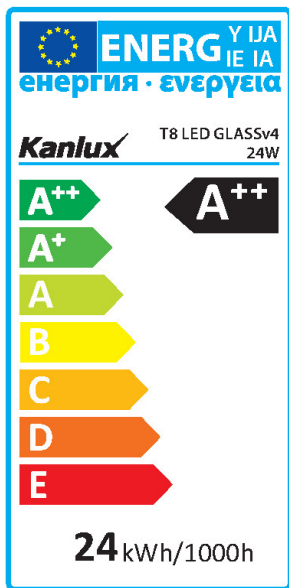

**Luminous flux retention factor at the end of rated service life [%]:**  $\geq 70$

**Luminous flux retention factor after the period of 6000h [%]:**  $\geq 80$

**Light source shape:** liniowa

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 25

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 25

**Net unit weight [g]:** 252

**Grammage [g]:** 359.6

**Length of a unit pack [cm]:** 155

**Width of a unit pack [cm]:** 3

**Height of a unit pack [cm]:** 3

**Weight of a cardboard box [kg]:** 8.99

**Width of a cardboard box [cm]:** 19.5

**Height of a cardboard box [cm]:** 18.5

**Length of a cardboard box [cm]:** 159

**Volume of a cardboard box [m<sup>3</sup>]:** 0.057359

### ADDITIONAL INFORMATION:

- One-way fluorescent LED-power supply
- 3 years Warranty under the terms of the warranty statement, available on our website