





## DOWNUNDER OUT LED S


outdoor recessed wall light, LED, 3000K, anthracite

The DOWNUNDER OUT LED S recessed wall light is made of aluminium, and outfitted with high output SMD LEDs that produce downward directed, glare-free light emission. Thanks to its IP55 protection class, the luminaire is suitable for outdoor use. The luminaire is connected directly to the 230V mains supply. A mounting pot is included in the delivery for simple assembly.

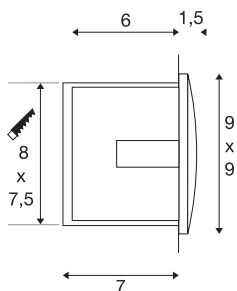

## TECHNICAL DATA

Item no.:	233605
Lamps included	0
Primary nominal voltage	220-240V ~50/60Hz mA/V
Secondary power / secondary voltage	300 mA/V
Width	9.0 cm
Height	9.0 cm
Depth	5.0 cm
Installation length	8.0 cm
Installation width	7.5 cm
Installation depth	7.0 cm
Net weight	0.256 kg
Gross weight	0.297 kg
IP Code	IP 55
Safety class	I
Assembly	Recessed
Assembly details	Wall
Wattage	1.7 W
Lumen	25 lm
Colour temperature	3000 Kelvin
Color	anthracite
CRI	>80
Binning	5

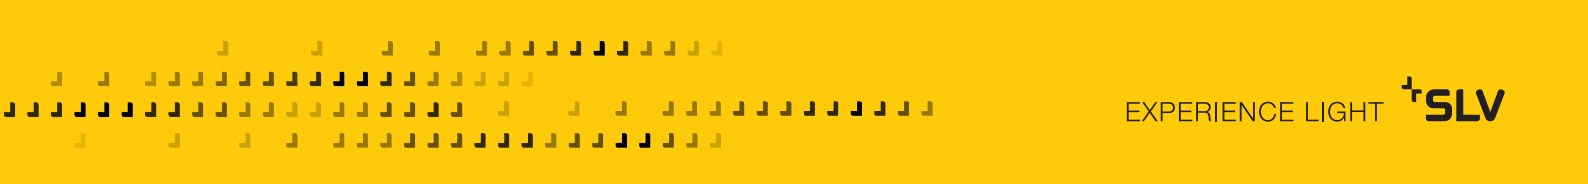

LXXBXX data	70/50
Service life	25000 h
Minimum ambient temperature	-25 °C
Maximum ambient temperature	50 °C
BIG WHITE Page	731

**Notes**

---

---

---

---

---