


LED dustproof lighting fitting

5905339288677



GENERAL DATA:

Colour: grey

Place of assembly: ceiling mounted, wall mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Possibility of fixture-loop-through connection: yes

Compatible with a dimmer: DALI

Replaceable light source: no

Length [mm]: 1480

Width [mm]: 80

Height [mm]: 70

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50/60

Maximum power [W]: 73

Class of protection against electric shock: I

Lampshade material: PC

Diode type: LED SMD

Luminous flux [lm]: 10200

Colour temperature: white

Colour temperature [K]: 4000

Colour uniformity [SDCM]: ≤3

Colour-rendering index Ra: ≥80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L90B10

Number of on/off cycles: ≥30000

Lighting angle [°]: X115/Y105

Luminous efficiency of the lamp [lm/W]: 140

Ambient temperature range to which the product can be exposed: -25÷35

Shade type: grooved

Enclosure material: PC

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 0,5÷2,5

The fixture set includes built-in LED's with the following energy classes: A++,A+,A

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5

Maximum number of loop-through-connected fixtures: 7

IK class: 08

IP class: 65

LOGISTIC DATA:

LED dustproof lighting fitting

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2060

Grammage [g]: 2290

Length of a unit pack [cm]: 150

Width of a unit pack [cm]: 8.5

Height of a unit pack [cm]: 7.5

Weight of a cardboard box [kg]: 2.29

Width of a cardboard box [cm]: 8.5


Height of a cardboard box [cm]: 7.5

Length of a cardboard box [cm] : 150

Volume of a cardboard box [m³]: 0.009563

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

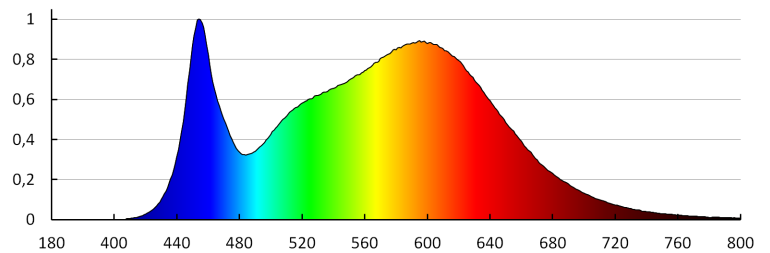

KANLUX S.A. (kat 28867) FTHL1500 73W-840-RYF / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28867) FTHL1500 73W-840-RYF
Lamps: 1 x FTHL1500 73W-840-RYF

