


## 33349 BENO N 18W NW-L-GR

Ceiling-mounted LED light fitting

5905339333490

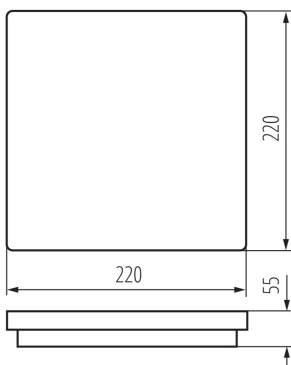

Kanlux BENO luminaires that's unique design and unique light effect. They were created on the basis of individual order of Kanlux, and their designs were registered by us at the patent office. Kanlux BENO LED also provides high weather resistance (IP54), quick and easy installation on the ceiling or wall, and Beno is equipped with the adjustable movement sensor. Kanlux BENO LED is a multifunctional fitting, which due to its design and its technical aspects, we can apply practically anywhere.

### GENERAL DATA:

**Colour:** graphite  
**Place of assembly:** wall mounted, ceiling mounted  
**Place of application:** Indoors and outdoors  
**Minimum distance from the illuminated object:** 0,5m  
**Possibility of fixture-loop-through connection:** yes  
**Compatible with a dimmer:** no  
**Replaceable light source:** no  
**Length [mm]:** 220  
**Width [mm]:** 220  
**Height [mm]:** 55  
**Integrated LED light source:** yes

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Maximum power [W]:** 18  
**Class of protection against electric shock:** II  
**Lampshade material:** plastic  
**Diode type:** LED SMD  
**Luminous flux [lm]:** 1400  
**Colour temperature:** white  
**Correlated colour temperature [K]:** 4000  
**Colour consistency in McAdam ellipses:**  $\leq 6$   
**Colour rendering index:** 80  
**Service life [h]:** 20000  
**Number of on/off cycles:**  $\geq 20000$   
**Lighting angle [°]:** 110  
**Luminous efficiency of the lamp [lm/W]:** 78  
**Ambient temperature range to which the product can be exposed:**  $-15 \div 35$   
**Enclosure material:** plastic  
**Connection type:** Self-clamping block  
**Range of sections of wires used [mm²]:**  $0,5 \div 1,5$   
**The fixture set includes built-in LED's with the following energy classes:** A++, A+, A

## 33349 BENO N 18W NW-L-GR

Ceiling-mounted LED light fitting

Lamp-heating time [s]:  $\leq 1$   
Lamp-ignition time [s]:  $\leq 0,5$   
IP class: 54

### LOGISTIC DATA:

Unit of measurement: unit  
Packaging method: 10  
Number of units in the secondary packaging: 1  
Number of units in the packaging: 10  
Net unit weight [g]: 480  
Grammage [g]: 637  
Length of a unit pack [cm]: 22.5  
Width of a unit pack [cm]: 6  
Height of a unit pack [cm]: 22.5  
Weight of a cardboard box [kg]: 6.37  
Width of a cardboard box [cm]: 32.5  
Height of a cardboard box [cm]: 25  
Length of a cardboard box [cm]: 47  
Volume of a cardboard box [m<sup>3</sup>]: 0.038188