


Facade luminaire

5905339224422



Kanlux ZEW luminaires are a perfect solution for illuminating facades of buildings of various types, while the light flux directed both upwards and downwards, they create one beautiful decorative light accents on the façade. Owing to the high class of tightness (IP44), the luminaires can be mounted in places directly exposed to weather conditions.

GENERAL DATA:

Colour: grey
Place of assembly: wall mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Replaceable light source: yes
Light source included: no
Fixture lighting direction: up and down
Length [mm]: 110
Width [mm]: 65
Height [mm]: 235


TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50/60
Maximum power [W]: 2 x max 35
Class of protection against electric shock: I
Light source: PAR16
Cap: GU10
Ambient temperature range to which the product can be exposed: -20÷35
The fixture is adapted to the light sources of the following energy classes: A++,A+,A,B,C,D,E
Enclosure material: aluminum alloy
Protective glass material: Tempered glass
Connection type: Bolt terminal block
Range of sections of wires used [mm²]: 1÷2,5
IP class: 44

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 12
Number of units in the secondary packaging: 1
Number of units in the packaging: 12
Net unit weight [g]: 980
Grammage [g]: 1126.67
Length of a unit pack [cm]: 11.5
Width of a unit pack [cm]: 11.5

Facade luminaire

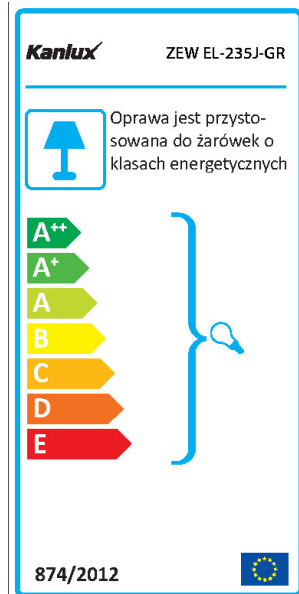

Height of a unit pack [cm]: 24.5
Weight of a cardboard box [kg]: 13.52004
Width of a cardboard box [cm]: 25
Height of a cardboard box [cm]: 53
Length of a cardboard box [cm] : 36
Volume of a cardboard box [m³]: 0.0477

