


Garden light fitting with replaceable light source

5905339256836



Kanlux SORTA are garden luminaires characterised by the option of changing the light source, which allows for adjusting the colour and power of lighting to individual needs. The luminaires are made of glass and aluminum. Their black and white colouring matches almost every scenery. The opal lampshade that evenly disperses light is its additional asset.

GENERAL DATA:

Colour: black

Place of assembly: surface mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,2m

Replaceable light source: yes

Light source included: no

Height [mm]: 500

Diameter [mm]: 110

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50/60

Maximum power [W]: max 20

Class of protection against electric shock: I

Lampshade material: PC

Light source: GLS/CFL/LED

Cap: E27

Ambient temperature range to which the product can be exposed: -20÷35

The fixture is adapted to the light sources of the following energy classes: A++,A+,A,B,C,D,E

Enclosure material: aluminum alloy

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 0,5÷2,5

IP class: 44

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 6

Number of units in the secondary packaging: 1

Number of units in the packaging: 6

Net unit weight [g]: 800

Grammage [g]: 1065


Length of a unit pack [cm]: 12.5

Width of a unit pack [cm]: 12.5

Height of a unit pack [cm]: 51.5

Weight of a cardboard box [kg]: 6.39

Garden light fitting with replaceable light source

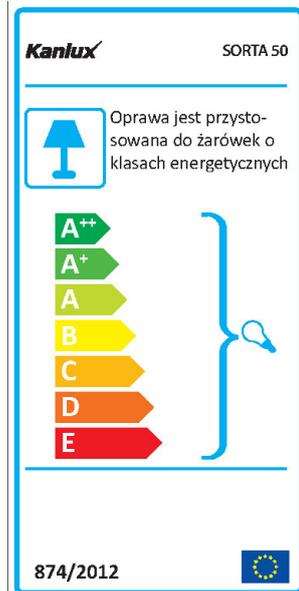

Width of a cardboard box [cm]: 28

Height of a cardboard box [cm]: 54

Length of a cardboard box [cm] : 39

Volume of a cardboard box [m³]: 0.058968

ADDITIONAL INFORMATION:

- max. width of source 55mm
- SORTA 16L-UP-SE equipped with a motion sensor / possibility of adjusting the time of lighting from 5s to 8 min / maximum motion detection range up to 3m / horizontal angle of motion detection 110 °

