


Ceiling-mounted spotlight fitting

5905339047045

IP
44/20

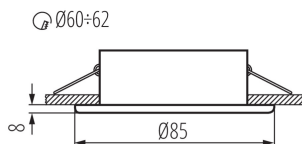

Kanlux MARIN means small and tight ceiling holders to be used in places with increased humidity. They can easily be placed in a bathroom above a mirror, in a kitchen or in a laundry.

GENERAL DATA:

Colour: nickel matte

Necessity of using self-shielding lamps: yes

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Replaceable light source: yes

The product is not suitable to be covered with a heat-insulating material: yes

Light source included: no

Height [mm]: 37

Diameter [mm]: 85

Assembly hole [mm]: Ø60-62

Wire length [m]: 0.12

TECHNICAL DATA:

Rated voltage [V]: 12 AC; 12 DC

Maximum power [W]: max 35

Class of protection against electric shock: III

Light source: MR16

Cap: Gx5,3

The fixture is adapted to the light sources of the following energy classes: A++,A+,A,B,C,D,E

Enclosure material: steel

Connection type: Free cable ends

Wire diameter [mm²]: 0.75

Lighting-fixture angle regulation: none

IP class: 44/20

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 50

Number of units in the secondary packaging: 1

Number of units in the packaging: 50

Net unit weight [g]: 100

Grammage [g]: 128

Length of a unit pack [cm]: 8.5


Width of a unit pack [cm]: 4

Height of a unit pack [cm]: 9

Weight of a cardboard box [kg]: 6.4

Width of a cardboard box [cm]: 22.5

Ceiling-mounted spotlight fitting

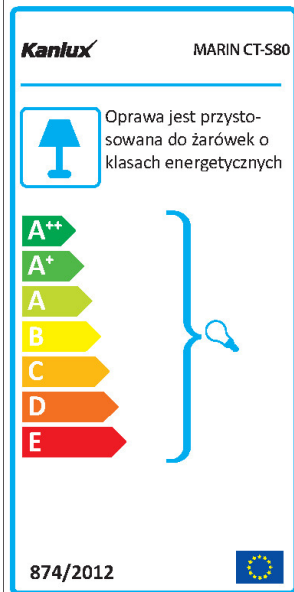

Height of a cardboard box [cm]: 20

Length of a cardboard box [cm] : 45.5

Volume of a cardboard box [m³]: 0.020475

ADDITIONAL INFORMATION:

- better resistance to moisture and dust
- designed for use in areas with a higher humidity level, e.g. bathrooms

